


ELAN-Guard® EM 59-60MR Epoxy Emulsion

Environmentally-Friendly Emulsion

- Exceptional bond strength
- Low VOC
- Very low viscosity for great penetration
- Flash point > 200° F
- Very stable tank life
- Water reducible
- No co-solvents
- UL 1446A listed
- UL 984 listed for hermetic applications

Featured Product

ELAN-Guard® EM 59-60MR is a water-emulsified epoxy resin that represents a true breakthrough in resin technology. There are minimal tank adjustments needed, its thin film requires little-to-no cleanup, and it has almost no run-off in the oven. Gentle agitation or recirculation is all that is required to keep this resin in suspension.

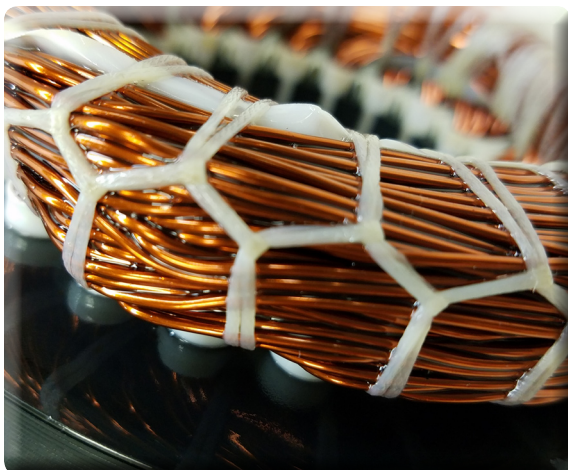

ELAN-Guard® EM 59-60MR Epoxy Emulsion is used in the electric motor repair industry as well as by major original equipment hermetic manufacturers. They use it because of its exceptional bond strength and its tough, thin chemically-resistant film.

The environment loves **ELAN-Guard® EM 59-60MR** Epoxy Emulsion because it has low VOCs which cause pollution. Insurance companies and fire departments love it because of its high flash point. Your employees will love it because there are no noxious odors.

Ask your sales representative for more information on **ELAN-Guard® EM 59-60MR** Epoxy Emulsion.

A member of  **ALTANA**

**You Build it
We Protect it**

 **ELANTAS**
Electrical Insulation